


Fargo Glass & Paint Co.

For more information on available door styles and glass options, please see the Fargo Glass & Paint Co. Stock Door Brochure.




Topcoat Maintenance


- » Masonite recommends cleaning their doors and sidelites a few times a year using a mild detergent with warm water. They also reccomend repairing and re-applying the topcoat every 1 to 2 years using a high-quality, UV stabilized, clear exterior polyurethane coating.
- » Refer to the installation and finishing instructions on the Masonite website.
- » Follow the topcoat manufacturer's instructions carefully.

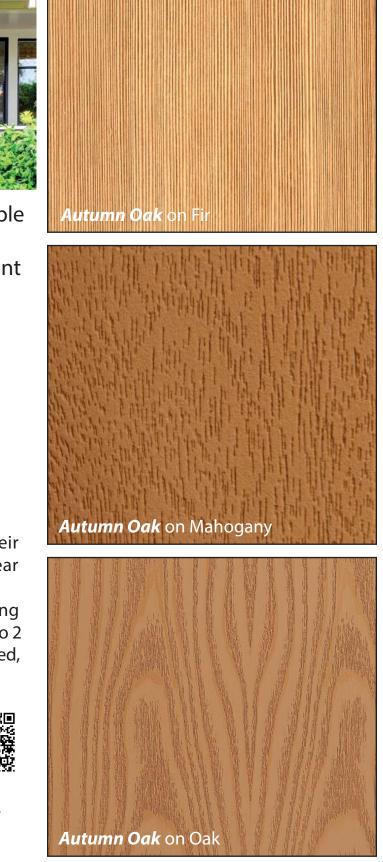







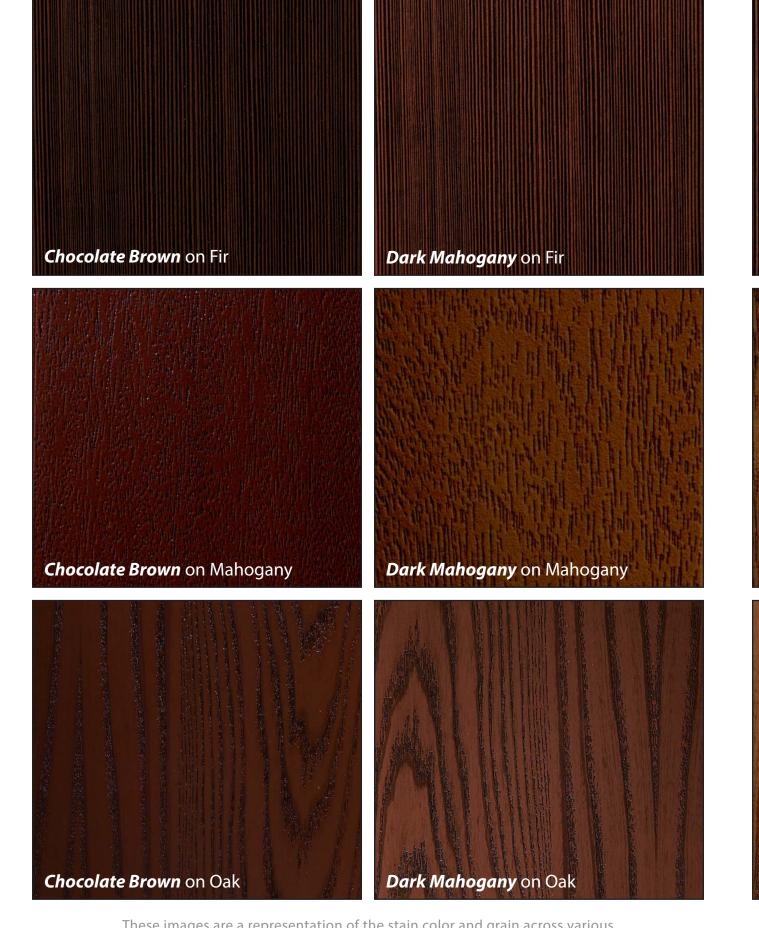


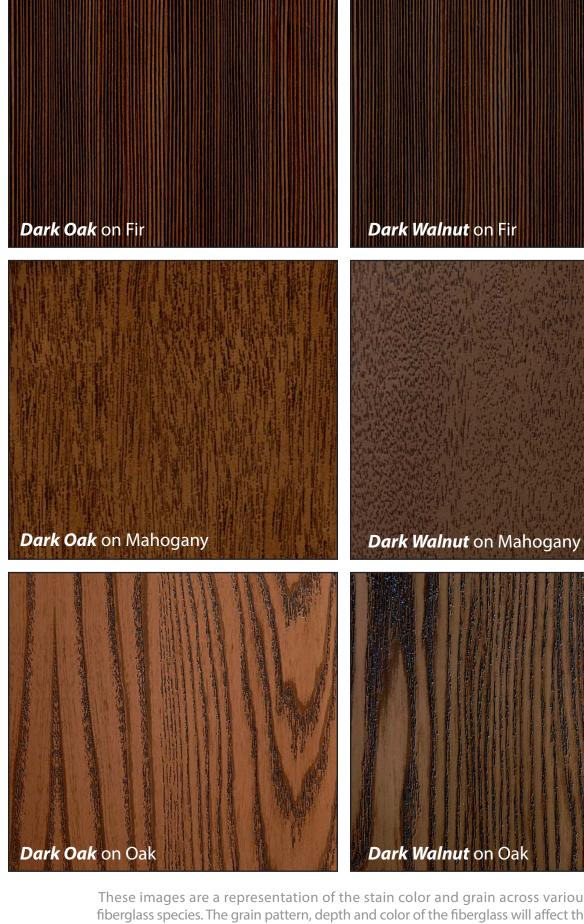












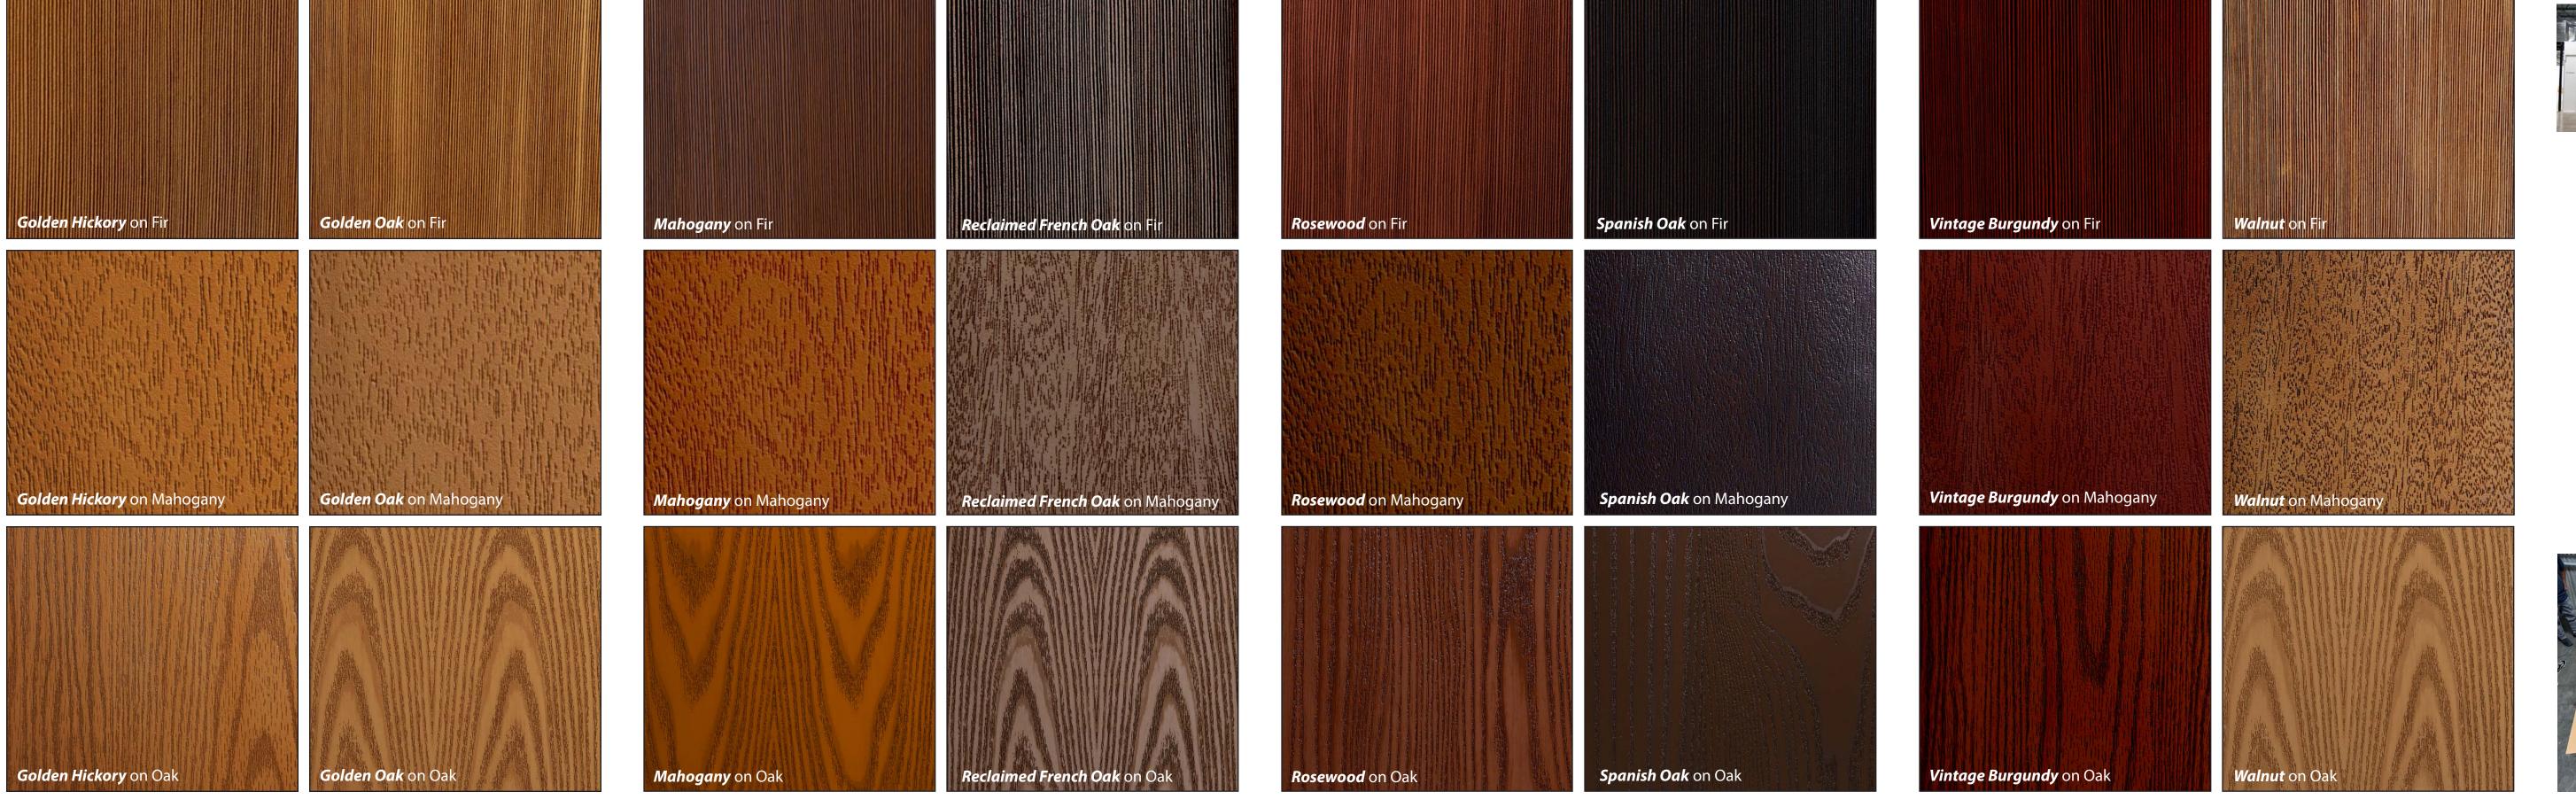


These images are a representation of the stain color and grain across various fiberglass species. The grain pattern, depth and color of the fiberglass will affect the overall appearance. Reach out to your sales representative for further details.


These images are a representation of the stain color and grain across various fiberglass species. The grain pattern, depth and color of the fiberglass will affect the overall appearance. Reach out to your sales representative for further details.

These images are a representation of the stain color and grain across various fiberglass species. The grain pattern, depth and color of the fiberglass will affect the overall appearance. Reach out to your sales representative for further details.













The Fargo Glass & Paint Company paint shops can handle not only our standard listed colors, but can also custom match almost any existing woodwork colors. FGP will supply you with a high quality finish that will not only meet, but exceed your expectations for your project.









